

S 75 corner

GSM.0800 | GSM.0900



Ø 150 Pijpdiameter (mm)
Pipe diameter (mm)
Diamètre buse (mm)
Abgasstutzen (mm)

% 75,0 Efficiëntie
Efficiency
Efficacité
Effizienz

kW 9,0 Vermogen output (kW)
Capacity output (kW)
Puissance output (kW)
Leistung output (kW)

KG 100 Gewicht (kg)
Weight (kg)
Poids (kg)
Gewicht (kg)







B Boven aansluiting
Connection top
Raccordement dessus
Anschluss oben

→ Externe luchttoevoer
External air supply
Prise d'air extérieure
Externer Luftanschluss







B² Bimsch 2
Bimsch 2
Bimsch 2
Bimsch 2



GSM.0800
links/left/gauche

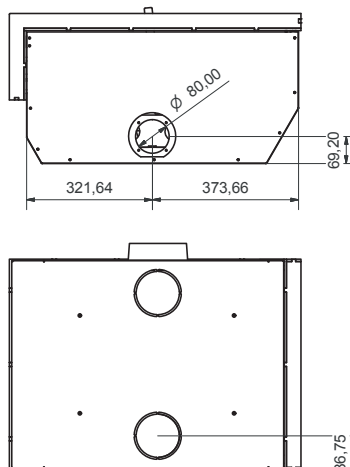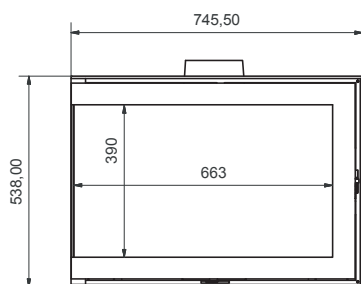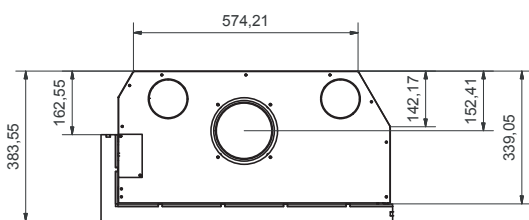

GSM.0900
rechts/right/droite

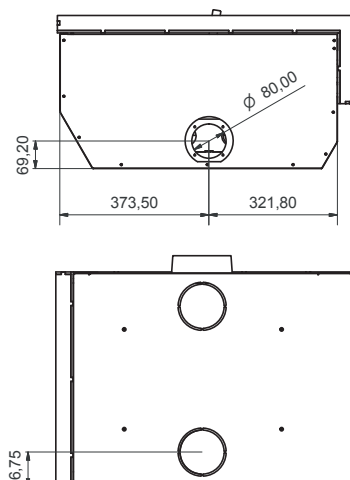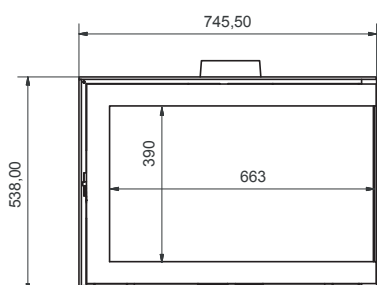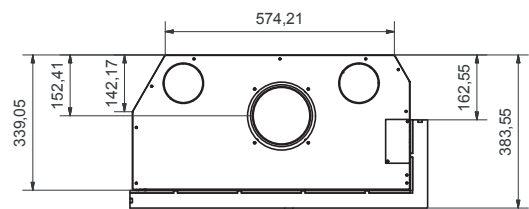

Wanders fires & stoves
Amtweg 4
7077 AL NETTERDEN
The Netherlands
Tel: +31 (0)315 - 386 414
Fax: +31 (0)315 - 386 201
info@wanders.nl
www.wanders.nl



wanders
fires & stoves